




W13




APU[®]

PROFILES FOR COMPOUND HEAT INSULATION SYSTEMS

Corner bead with mesh


ULTRA-TEX

With 2 x 12.5 cm mesh

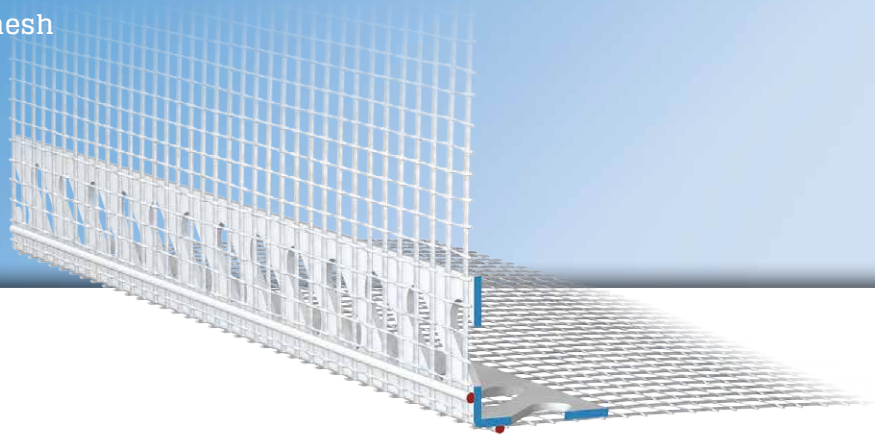

The **APU corner bead with mesh ULTRA-TEX** is used in compound heat insulation systems as a flush, impact-protected edge for thin top layers of plaster.

The corner bracket has 2 perforated wings to each of which a strip of mesh is welded. The filler filaments serve as a skimming bar for the application of plaster. Upon completion of the plastering work what is produced is a clean plaster corner.



Design

	ITEM NO.	LENGTH	PACKAGING UNIT	WEIGHT (per PU)
--	----------	--------	----------------	-----------------

ULTRA-TEX corner bead with mesh

W13 With 2 x 12.5 cm mesh	W13-2000	2.0 m	50 bars = 100 m	11.7 kg
------------------------------	----------	-------	-----------------	---------

Features


	ULTRA-TEX CORNER BEAD WITH MESH
Material	<ul style="list-style-type: none"> ■ Rigid PVC manufactured under DIN-16941
Mesh	<ul style="list-style-type: none"> ■ Min. 160 g/m² approved for compound heat insulation systems ■ 2 x 12.5 cm wide – MW 4x4 mm ■ Ultrasonic welded

Important information


Storage	Always store profiles laid down in a dry place.
Other applications	Any applications not clearly described in the documents may be implemented only after consultation with the plaster or ETICS manufacturer.

For information on materials, areas of use, tests and correct application, please refer to our 'General Advice and Information'

Details

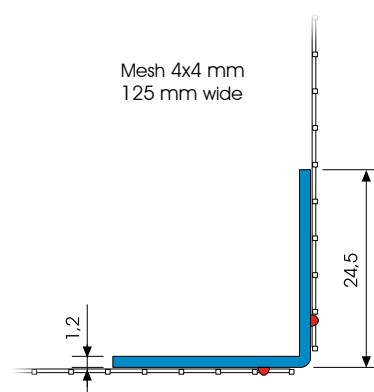

Sectional drawing in mm

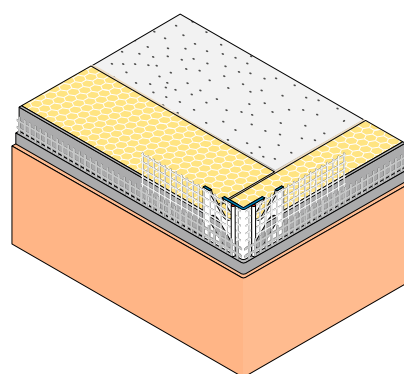

Application drawing