



W45-08


**APU®**

PROFILES FOR COMPOUND HEAT INSULATION SYSTEMS

Flashing bead

# FIN-TEX MINI

With 12.5 cm mesh

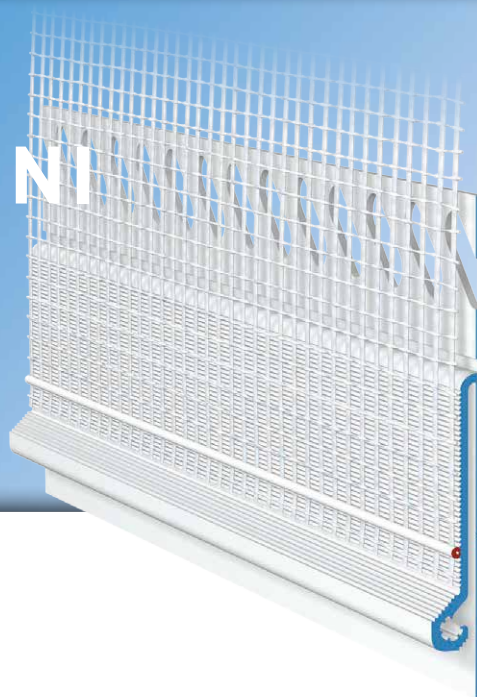


The **APU flashing bead FIN-TEX MINI** is used at junction points with metal plate in compound heat insulation systems (e.g., at junctions with the roof's edge) and as a result of its cavity design produces a flexible connection between plaster and metal. The profile is used for 8 mm plaster thickness and upon completion of the plastering work ensures that water is accurately guided away.

The profile has a welded fabric strip. Each bar has a fabric overhang on one side of 10cm in the lengthways direction. The included plug connectors (Z13) enable the profiles to be joined and fitted very precisely and flush. What is created after completion of the plastering work is a clean termination of the plaster.



W45-08



## Design

	ITEM NO.	LENGTH	PACKAGING UNIT	WEIGHT (per PU)
--	----------	--------	----------------	-----------------

### Flashing bead FIN-TEX MINI

W45-08

With 12.5 cm mesh

W45-2008

2.0 m

25 bars = 50 m

11.7 kg

## Features

	FLASHING BEAD FIN-TEX MINI
Material	■ Rigid PVC manufactured under DIN-16941
Mesh	■ Min. 160 g/m <sup>2</sup> approved for compound heat insulation systems ■ 12.5 cm wide – MW 4 x 4 mm ■ Ultrasonic welded
Accessories	■ Z13-0000 Plug connectors (1 bag)

## Important information

Storage	Always store profiles laid down in a dry place.
Other applications	Any applications not clearly described in the documents may be implemented only after consultation with the plaster or ETICS manufacturer.
Movement	Stick profiles for movement absorption onto the sheet metal, providing a clearance of 10mm.


For information on materials, areas of use, tests and correct application, please refer to our 'General Advice and Information'




W45-08

## Details

W45-8

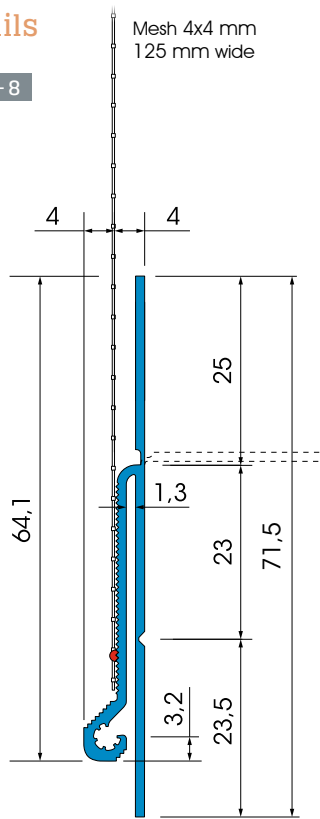

Sectional drawing in mm

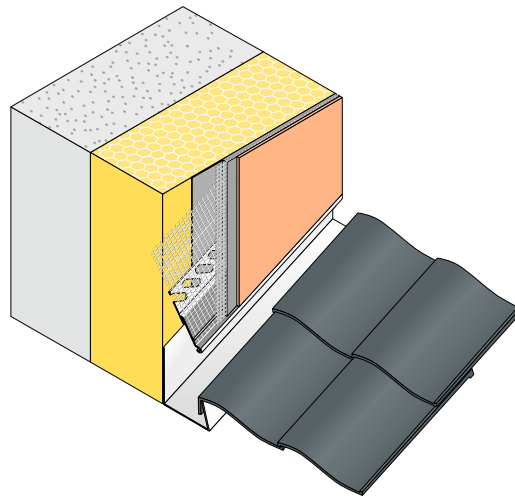

Application drawing