



Z58




# APU®

PROFILES FOR COMPOUND HEAT INSULATION SYSTEMS

## Slide bearing profile **PUR-FIX CORNER ELEMENT**

For internal and external corners

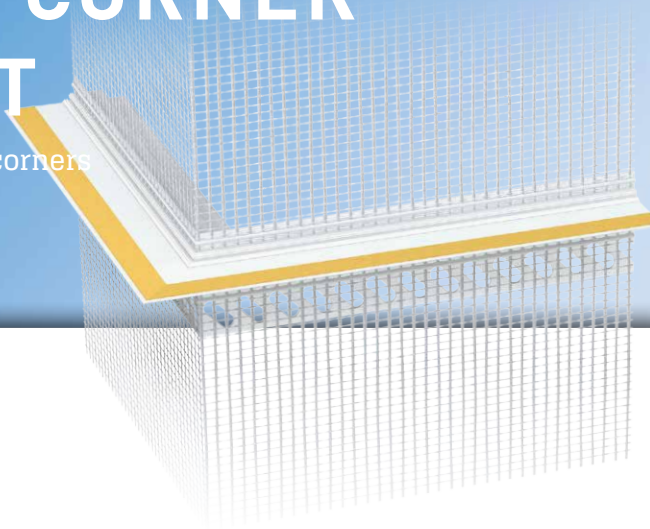

Using the **APU slide bearing profile PUR-FIX CORNER PIECES** for inner corners (Z58-I) and outer corners (Z58-A), clean, precise corners can be formed quickly and easily.

By means of the plug connectors provided (Z14) and the brackets (Z58-V) the corner pieces are connected to the incoming slide bearing profile (W58) and a clean, flush corner is produced.



Z58



## Design

	ITEM NO.	LENGTH	PACKAGING UNIT	WEIGHT (per PU)
--	----------	--------	----------------	-----------------

### PUR-FIX slide bearing profile - corner element

Z58

■ For internal corners	Z58-I-2020	0.2 m	5 units = 1 m	0.6 kg
■ For external corners	Z58-A-2020	0.2 m	5 units = 1 m	0.7 kg

## Features

	SLIDE BEARING PROFILE
Material	■ Rigid PVC manufactured under DIN-16941
Protective flap	■ Detachable with soft TPE connection and double-sided adhesive tape
Features	<ul style="list-style-type: none"> <li>■ PE foam tape 10x3 mm</li> <li>■ PE foam tape 8x3 mm</li> </ul>
Seal	<ul style="list-style-type: none"> <li>■ PUR sealing strip, 10 mm, type BG1</li> <li>■ Watertight for joints of 3-9mm</li> </ul>
Mesh	<ul style="list-style-type: none"> <li>■ Min. 160 g/m<sup>2</sup> approved for compound heat insulation systems</li> <li>■ 2 x 12.5 cm wide – MW 4x4 mm</li> <li>■ Ultrasonic welded</li> </ul>
Accessories	<ul style="list-style-type: none"> <li>■ Z14-0000 Plug connectors (1 bag)</li> <li>■ Z58-V-0000 Bracket (1 bag)</li> </ul>
Suitable for	W58      PUR-FIX slide bearing profile

## Important information

Other applications      Any applications not clearly described in the documents may be implemented only after consultation with the plaster or ETICS manufacturer.


For information on materials, areas of use, tests and correct application, please refer to our 'General Advice and Information'



Z58



## Details

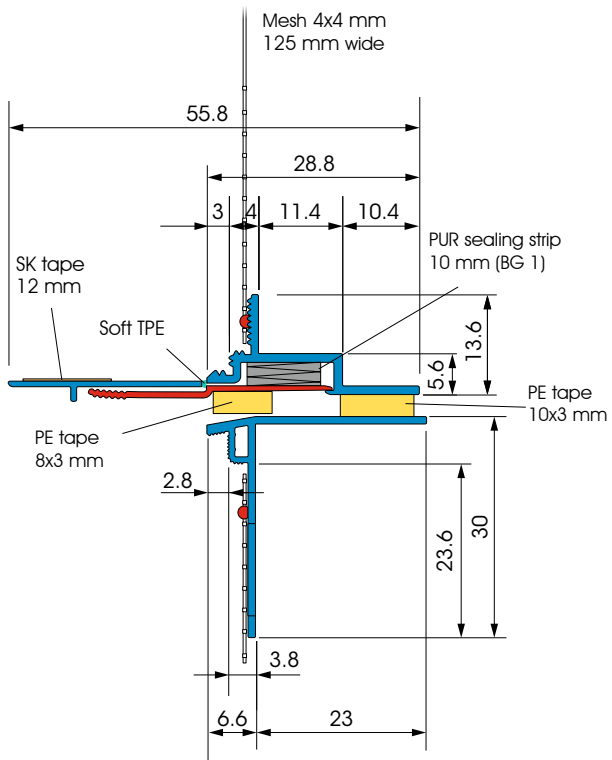

Sectional drawing in mm