



W12




APU[®]

PROFILES FOR COMPOUND HEAT INSULATION SYSTEMS

Corner bead with mesh


DUO-TEX-K

With edge for float-finish plaster

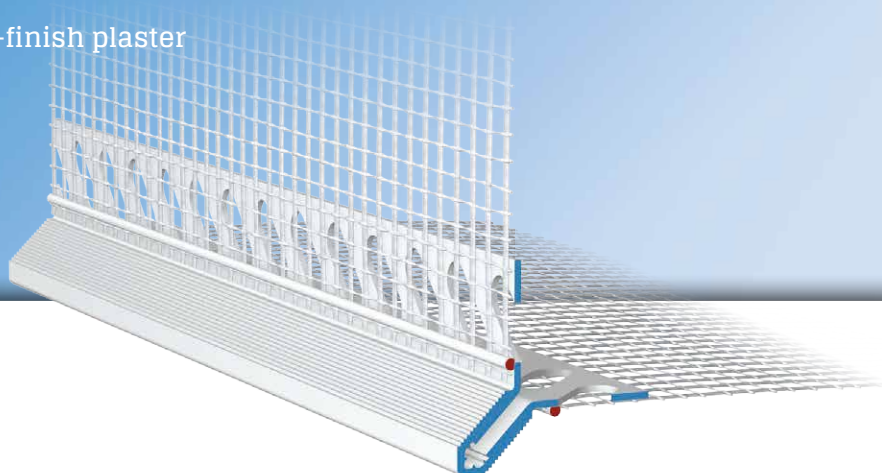

The **APU corner bead with mesh DUO-TEX** is used in compound heat insulation systems as a flush, impact-protected edge for float-finish plaster and thick plaster layers.

The corner bracket has 2 perforated wings to each of which a strip of mesh is welded. Each bar has a fabric overhang on one side of 10cm in the lengthways direction. The filler filaments serve as a skimming bar for the reinforcement base plaster. The skimming edge ensures the correct application thickness of the entire plaster system. The plug connectors provided (Z13) enable the profiles to be connected together flush with each other. Upon completion of the plastering work what is produced is a clean plaster corner.



Design

	ITEM NO.	LENGTH	PACKAGING UNIT	WEIGHT (per PU)
--	----------	--------	----------------	-----------------

DUO-TEX-K corner bead with mesh

W12	W12-2000	2.0 m	25 bars = 50 m	8.5 kg
-----	----------	-------	----------------	--------

With edge for float-finish plaster

Features

	DUO-TEX-K CORNER BEAD WITH MESH
Material	<ul style="list-style-type: none"> ■ Rigid PVC manufactured under DIN-16941
Mesh	<ul style="list-style-type: none"> ■ Min. 160 g/m² approved for compound heat insulation systems ■ 2 x 12.5 cm wide – MW 4 x 4 mm ■ Ultrasonic welded
Accessories	<ul style="list-style-type: none"> ■ Z13-0000 Plug connectors (1 bag)

Important information

Storage	Always store profiles laid down in a dry place.
Other applications	Any applications not clearly described in the documents may be implemented only after consultation with the plaster or ETICS manufacturer.

For information on materials, areas of use, tests and correct application, please refer to our 'General Advice and Information'

Details

