



W41



APU[®]

PROFILES FOR COMPOUND HEAT INSULATION SYSTEMS

Stop bead with mesh

FEBA-TEX-ATTIKA

With soft drip edge and
12.5 cm mesh



The **APU stop bead with mesh FEBA-TEX-ATTIKA** is used in compound heat insulation systems. It forms a clean plaster termination under window sills or around roof parapets.

The profile has a PVC bar with holes punched in it. There is a fabric window reveal bead welded onto the profile. Each bar has a fabric overhang on one side of 10cm in the lengthways direction. Using the plug connectors (Z14) provided, the profiles can be aligned together flush where they butt up with each other. The soft, transparent drip edge accurately guides water away.



Design

	ITEM NO.	LENGTH	PACKAGING UNIT	WEIGHT (per PU)
--	----------	--------	----------------	-----------------

FEBA-TEX-ATTIKA stop bead with mesh

W41: With soft drip edge and 12.5 cm mesh	W41-2000	2.0 m	15 bars = 30 m	3.8 kg
--	----------	-------	----------------	--------

Features


	FEBA-TEX-ATTIKA STOP BEAD WITH MESH
Material	<ul style="list-style-type: none"> ■ Rigid PVC manufactured under DIN 16941 ■ Soft PVC – transparent
Seal	<ul style="list-style-type: none"> ■ By others
Mesh	<ul style="list-style-type: none"> ■ Min. 160 g/m² approved for compound heat insulation systems ■ MW 4 x 4 mm ■ Ultrasonic welded
Accessories	<ul style="list-style-type: none"> ■ Z14-0000 Plug connectors (1 bag)

Important information


Storage	Always store profiles laid down in a dry place.
Other applications	Any applications not clearly described in the documents may be implemented only after consultation with the plaster or ETICS manufacturer.

For information on materials, areas of use, tests and correct application, please refer to our 'General Advice and Information'

Details

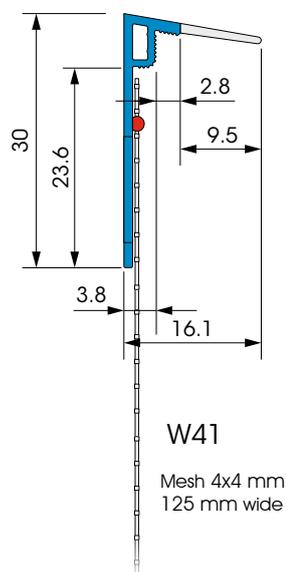

Sectional drawing in mm

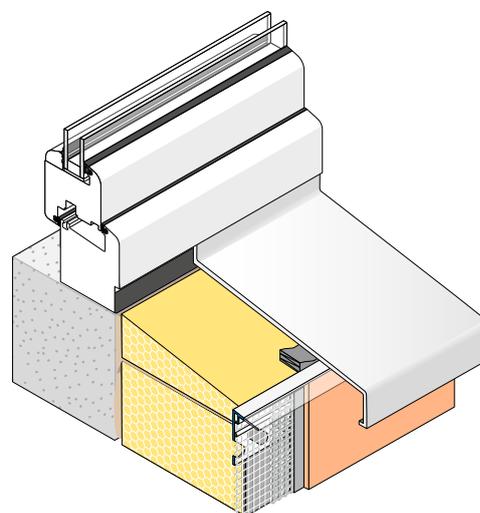

Application drawing