V85

APU®

PROFILES FOR COMPOUND HEAT INSULATION SYSTEMS

Clip-on profile

VHF-FIN-TEX

12 mm,
for 4 mm plaster edge

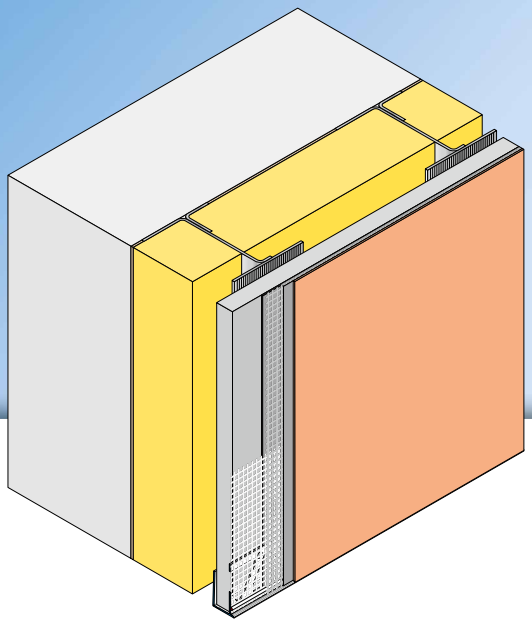

For back-ventilated rainscreens the **APU clip-on profile VHF-FIN-TEX** is used as a termination onto the edge of the supporting board.

The profile has a punched plaster bar. Welded onto the bar is a fabric strip. Each bar has a fabric overhang on one side of 10cm in the lengthways direction. For improved hold, the rear limb is pre-tensioned.
What is created after completion of the plastering work is a clean termination of the plaster.

FITTING TIPS



Verarbeitung

1. Using appropriate trimming shears with supporting surface, cut profile to the desired size.
2. Put the profile on the one side on the existing base board and push it towards the other end onto the board.
3. Apply reinforcement base plaster over the full area. In doing so, pull the mesh up to the plaster edge and trim.
4. After leaving to stand for the required time, apply final render.

Wichtige Hinweise

- When the work is being done, the surface temperature must be at least +5 degrees and must not exceed +40 degrees.
- After being set in place on the structural element, profiles with a mesh vane must be promptly embedded. Until then they must be protected from the weather, e.g. sun and wind.
- The surface mesh to be subsequently attached must be run up to the skimming edge of the profile.
- The processing guidelines of the plaster manufacturer shall be complied with.

APU AG · Rheinweg 7 · 8200 Schaffhausen · Switzerland · info@apu.ch · www.apu.ch