



Profiles for interior and exterior plastering

A12



APU Fillet FIX
with two plaster level bars

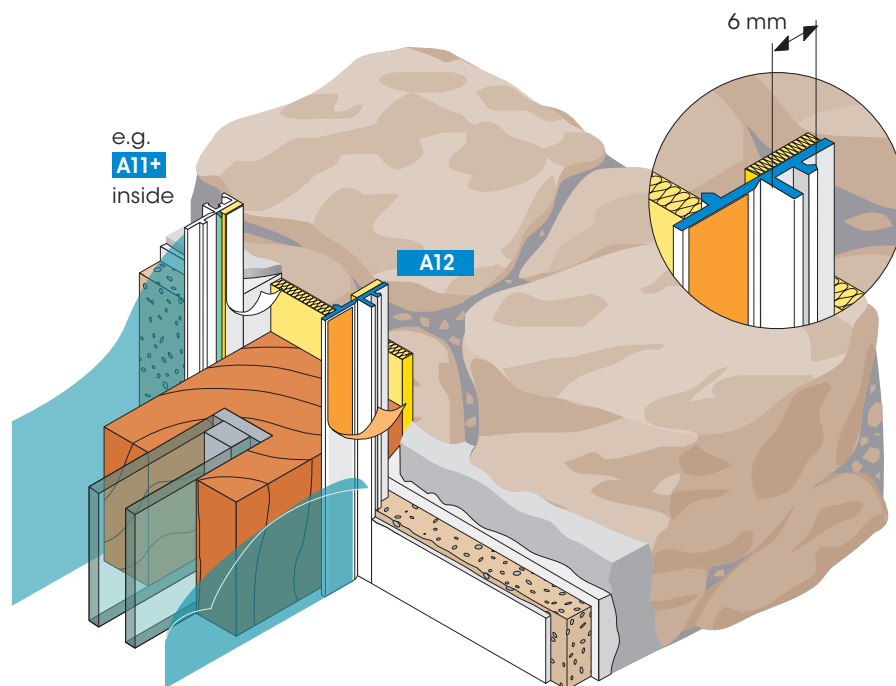

Existing plasters can be repaired with high-quality filler material and fabric reinforcement preventing further surface cracks. This APU profile with **two plaster level bars** forms a sealed and durable, driving rain safe movement joint between the filler material and component. The fillet is equipped with a self-adhesive PE Sealing Tape that, by pressing it to the frame, forms a tight joint.

For the plastering work, the on-site protective foil is fixed on the self-adhesive Protective Tab. On completing the plastering and painting work the Protective Tab is removed at the predetermined breaking line.

Available in packed unit:

30 bars of 2.40 m = 72.00 m

For detailed information see technical information sheet or visit us on the Internet at www.apu.ch. The most up-to-date APU-selection criteria are to be adhered to.