# Profiles for interior and exterior plastering

A38-pro



## APU Joint Profile PUR-FIX-pro

Plaster joints to large window and door systems up to 15 m²

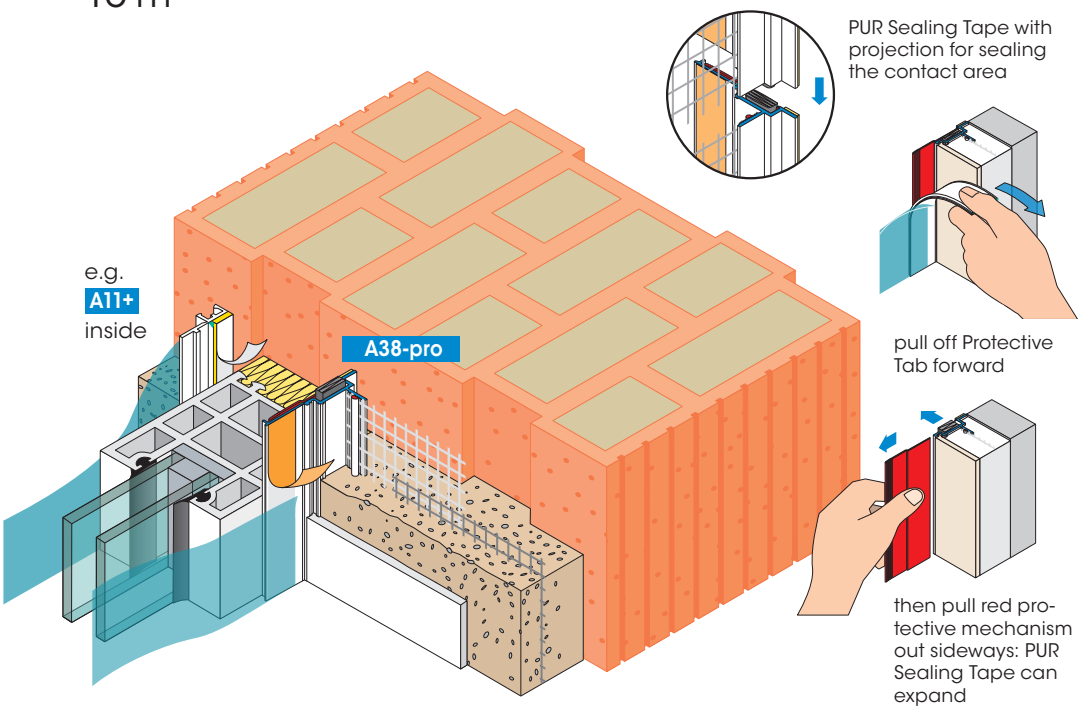


The APU Joint Profile PUR-FIX-pro is intended for plaster joints, where larger movements must be expected and bonding to the component is not desired.

The profile is equipped with a compressed PUR Sealing Tape, which is released when the protective mechanism is removed and expands directly to the frame component, sealing tight against driving rain. The PUR Sealing Tape is stuck into the profile and has a projection on both ends to seal the contact area between two profiles. For temporary fixation the profile is additionally equipped with a self-adhesive PE tape.

A self-adhesive tape on the protective tab takes up the on-site PE protective foil during the plastering work. Finally the Protective Tab will be pulled off, resulting in a neat plaster edge.

**Available packed unit:**
25 bars of 2.40 m = 60.00 m

For detailed information see technical information sheet or visit us on the Internet at **www.apu.ch**. The most up-to-date APU-selection criteria are to be adhered to.

APU AG

A38pro/F34/HF-KT/09.18 subject to changes without notice