



Profiles for external thermal insulation composite systems "ETICS"

W15



APU Corner Bracket with fabric STABILO

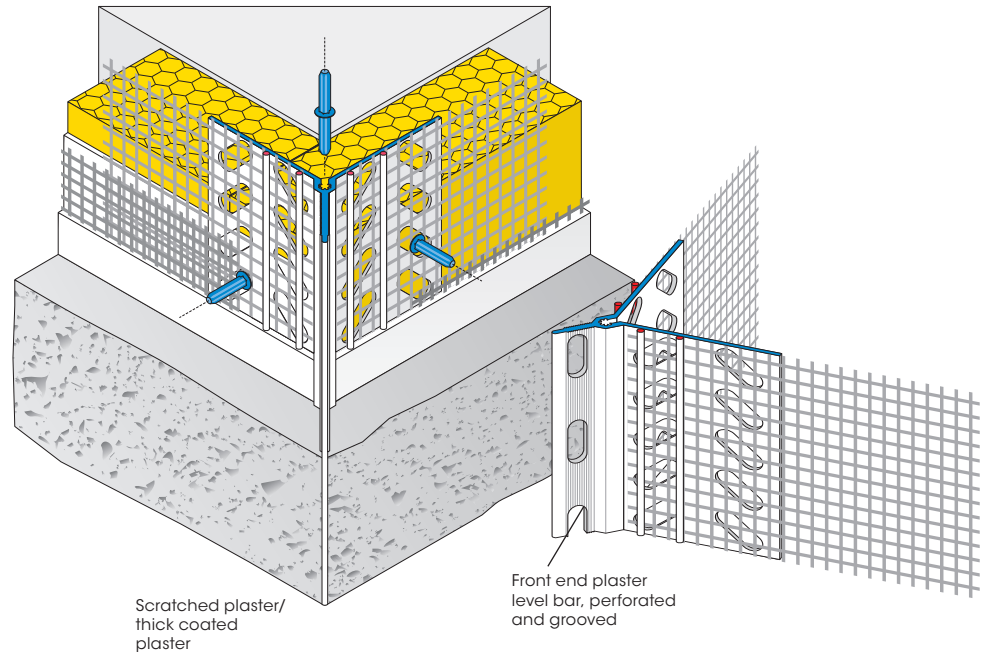

The Corner Bracket with fabric STABILO is provided with wide plastic flanks with two rows of perforations. The fabric parts fastened each with two welding cords that form the plaster level bars for the filler layer high.


The front end plaster level bar tapered towards the corner is perforated and grooved for improved plaster grip and, depending on the application, it can be supplied in 8, 11 or 17 mm variations.

This Corner Bracket with fabric is suitable especially for thick coated systems. The bracket can also be used for basic plasters in the interior and exterior areas (available without the fabric as corner angle A23).

**Available packed unit:**  
25 bars of 2.00 m = 50.00 m  
Plug Connectors are enclosed

For detailed information see technical information sheet or visit us on the Internet at [www.apu.ch](http://www.apu.ch).


## Application examples scratched plaster/thick coated plaster

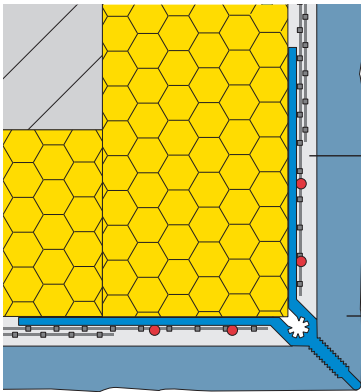

**W15-2008**  
**12 mm plaster coating**

fabric layer plaster  
ca. 4 mm


scratched plaster  
ca. 8 mm

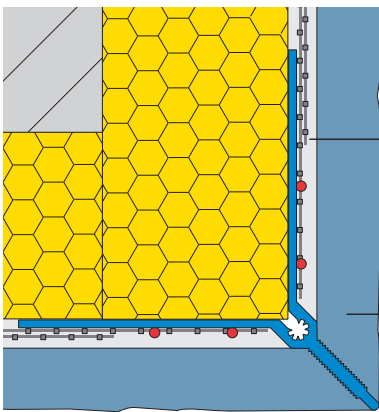

**W15-2011**  
**15 mm plaster coating**

fabric layer plaster  
ca. 4 mm

scratched plaster  
ca. 11 mm

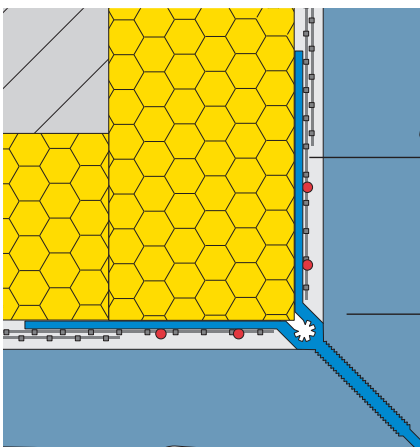

**W15-2017**  
**21 mm plaster coating**

fabric layer plaster  
ca. 4 mm

scratched plaster  
ca. 17 mm

For detailed information see technical information sheet or visit us on the Internet at [www.apu.ch](http://www.apu.ch).

