



Profiles for external thermal insulation composite systems "ETICS"



APU Joint Profile with fabric COMPACT-pro

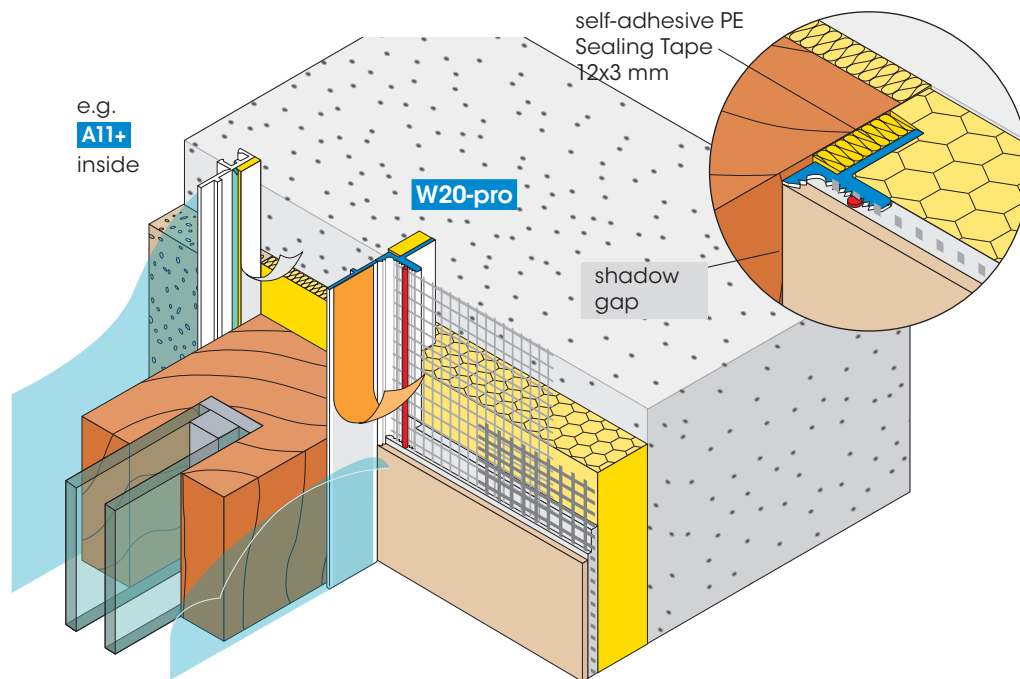

Outer walls with thermal insulation composite systems require inside and outside sealed and secure plaster joints to doors, windows and other structural components.

The APU Joint Profile with fabric COMPACT-pro with covered self-adhesive PE Sealing Tape forms a permanent UV-resistant **shadow gap**.

The plastic profile forms a secure joint between the fabric filler and the component parts. For plastering/painting work, the on-site protective foil is pressed onto the self-adhesive Protective Tab. A neat plaster joint is the result upon removing the Protective Tab.

**Available packed unit:**  
25 bars of 2.40 m = 60.00 m

For detailed information see technical information sheet or visit us on the Internet at [www.apu.ch](http://www.apu.ch). The most up-to-date APU-selection criteria are to be adhered to.