



Profiles for external thermal insulation composite systems "ETICS"

W29-pro-K



APU Joint Profile with fabric PUR-EX-pro-K for scratch plasters

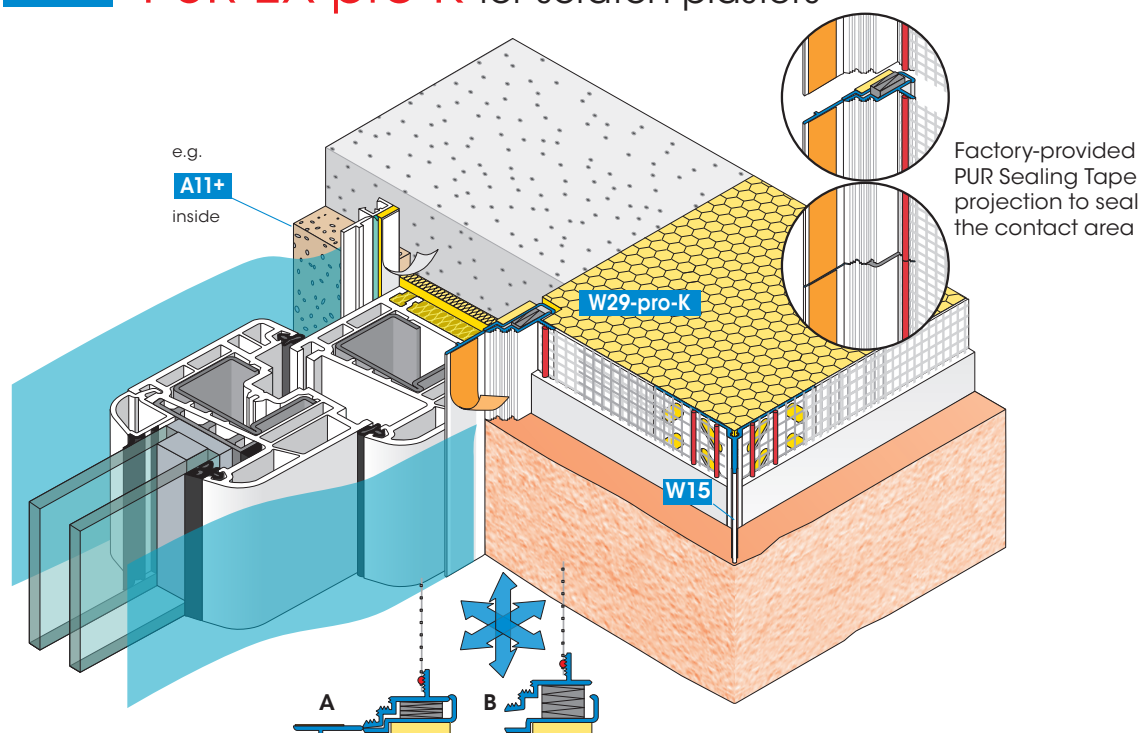

The APU Joint Profile with fabric PUR-EX-pro-K is equipped with a compressed and pushed in PUR Sealing Tape (A), which is released by removing the Protective Tab, and expands freely as required (B). It provides a **decoupled (*) solution** between a plaster system and the framework.

The profile is provided with a welded on fabric part. The front edge is stepped and grooved to give the plaster a well aligned fitting. The compressed PUR Sealing Tape has a projection at the profile end to seal between the profile joints. The tape meets specifications for **resistance to driving rain**.

The profile W29-pro-K is used according to the APU selection criteria in thermal insulation composite systems and in window/door systems where equalization movements are expected.

Available packed unit:

25 bars of 2.40 m = 60.00 m

For detailed information see technical information sheet or visit us on the Internet at www.apu.ch. The most up-to-date APU-selection criteria are to be adhered to.