
Profiles for external thermal insulation composite systems "ETICS"



## APU Joint Profile with fabric PUR-EX-pro for thin plaster

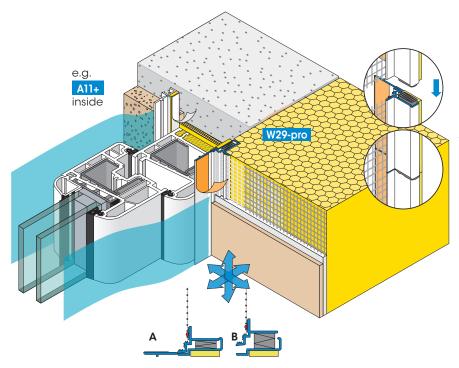

Factory-provided PUR Sealing Tape projection to seal the contact area between the profiles

The APU Joint Profile with fabric PUR-EX-pro is equipped with a compressed and pushed in PUR Sealing Tape (A), which is released by removing the Protective Tab, and expands freely as required (B). It provides a decoupled (\*) solution between plaster system and the framework.

The profile is provided with a welded on fabric part. The front edge is stepped and grooved to give the plaster a well aligned fitting. The compressed PUR Sealing Tape has a projection at the profile end to seal between the profile joints. The tape meets the specifications for resistance to driving rain.

The profile W29-pro is used according to the APU selection criteria in thermal insulation composite systems and in window/door systems where equalization movements are expected.

Driving rain proof according to component testing ift No. 10535965/3.



**Available packed unit:** 25 bars of 1.40 m = 35.00 m (on request) 25 bars of 2.40 m = 60.00 m

also available in grey color near RAL 7016

For detailed information see technical information sheet or visit us on the Internet at www.apu.ch. The most upto-date APU-selection criteria are to be adhered to.



