



Profiles for external thermal insulation composite systems "ETICS"






APU Telescopic Joint Profile with fabric DUAL-plus

with Protective Lip

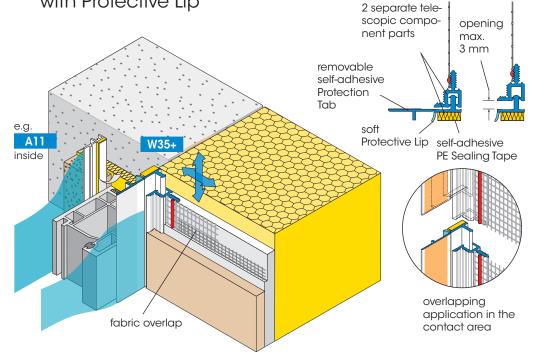



The profile is glued in front of the reveal insulation to the frame and the fabric part embedded into the plaster layer overlapping with the facade fabrics or the fabric of a corner bracket. The final plaster aligns flush with the profile's front edge. Both profile components, separate at production process, allow overlapping application in the contact area between the profiles for easy alignment and sealing at plastering time.

The self-adhesive Protective Tab takes up the on-site protective foil to protect the frame components during plastering and painting work. The self-adhesive PE Sealing Tape provides a permanent driving rain proof sealing, the flexible Protective Lip forms a visually neat transition to the frame.



Available packed unit:

25 bars of 2.40 m = 60.00 m

For detailed information see technical information sheet or visit us on the Internet at www.apu.ch. The most upto-date APU-selection criteria are to be adhered to.

