



Profiles for external thermal insulation composite systems "ETICS"

W36-pro



APU Joint Profile with fabric NEO-pro

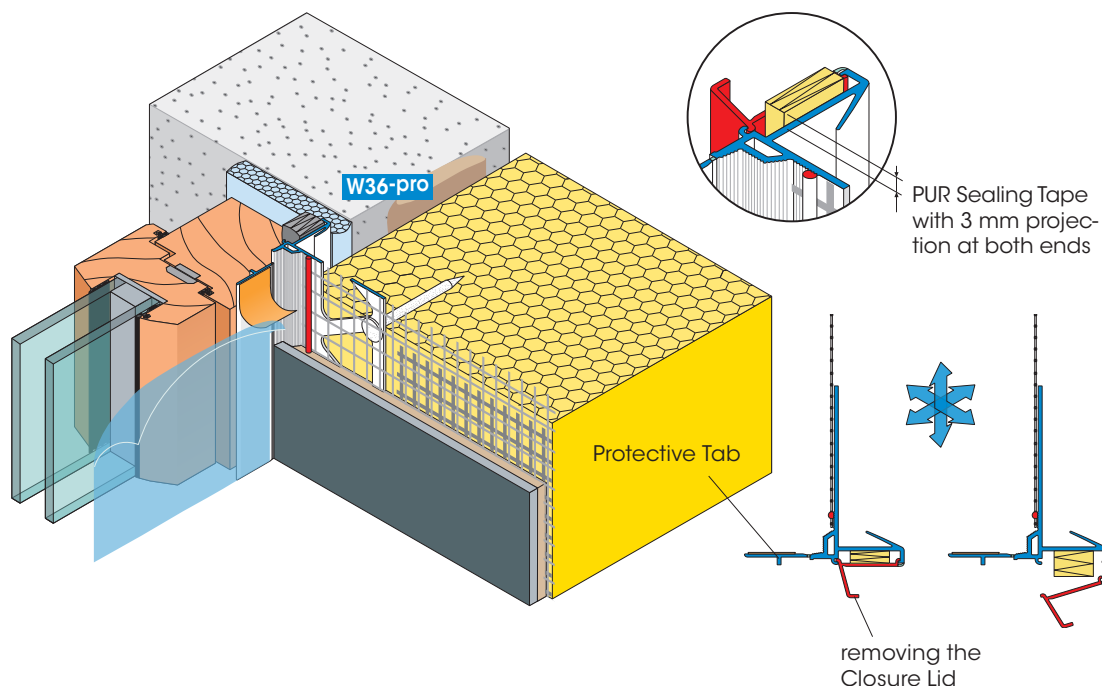

The Joint Profile with fabric NEO-pro is used for plaster joints in ETIC systems where bigger equalization movements are expected and when gluing on the window frame is not possible or not desired.

The profile is aligned dry, without fixing mortar along the window frame and fixed in position with the **APU Plastic Nail Z21 - behind the fabric part and to the insulating boards (4 nails per meter)**. The profile is equipped with an expanding PUR Sealing Tape, which is released by tearing off the Closure Lid. The fabric part of 12.5 cm width is welded onto the profile.

The Joint Profile with fabric NEO-pro is also suitable for retrofitting the window (hidden subframe method). Therefore the profile can be completely plaster finished before mounting the window (see next page). In this case, the Closure Lid remains closed until the window is in place to be mounted.

Available packed unit:

25 bars of 2.40 m = 60.00 m

For detailed information see technical information sheet or visit us on the Internet at www.apu.ch. The most up-to-date APU-selection criteria are to be adhered to.

