
W39/F34/HF.KT/08.18 subject to changes without notice




Profiles for external thermal insulation composite systems "ETICS"





APU Joint Profile with fabric PUR-FIX-R

for lateral joints to projecting roller shutter systems

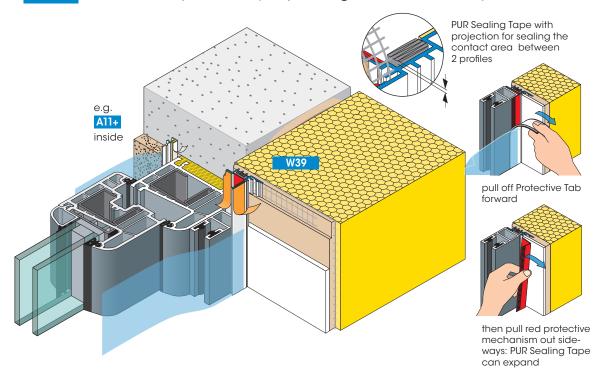



The APU Joint Profile with fabric PUR-FIX-pro-R is used in ETIC systems laterally to the guide rails where bigger equalization movements are expected.

The profile is equipped with a compressed PUR Sealing Tape, which is released when the protective mechanism is removed and expands directly to the frame component, sealing tight against driving rain. The PUR Sealing Tape is longitudinally stuck into the profile and has a projection on both ends to seal the contact area between two profiles. For temporary fixation the profile is additionally equipped with a self-adhesive PE tape. A fabric part of 12.5 cm wide is welded onto the profile bar with one-sided overhang lengthways. The Protective Tab with a self-adhesive tape takes up the on-site protective foil to protect the window during plastering. The Protective Tab can then be pulled off, resulting in a neat plaster edge.

Lateral and upper connections must be selected according to the installation situation and the shape of the inspection flap.



Available packed unit:

25 bars of 2.40 m = 60.00 m

For detailed information see technical information sheet or visit us on the Internet at www.apu.ch. The most upto-date APU-selection criteria are to be adhered to.

