



W67-2/F34/HF-KT/01..17 subject to changes without notice

APU<sup>®</sup> APU<sup>®</sup> APU<sup>®</sup> APU<sup>®</sup>

Profiles for external thermal insulation composite systems "ETICS"



**APU Base Edge Profile SOKA-FIX**  
for all insulation thicknesses in the base area

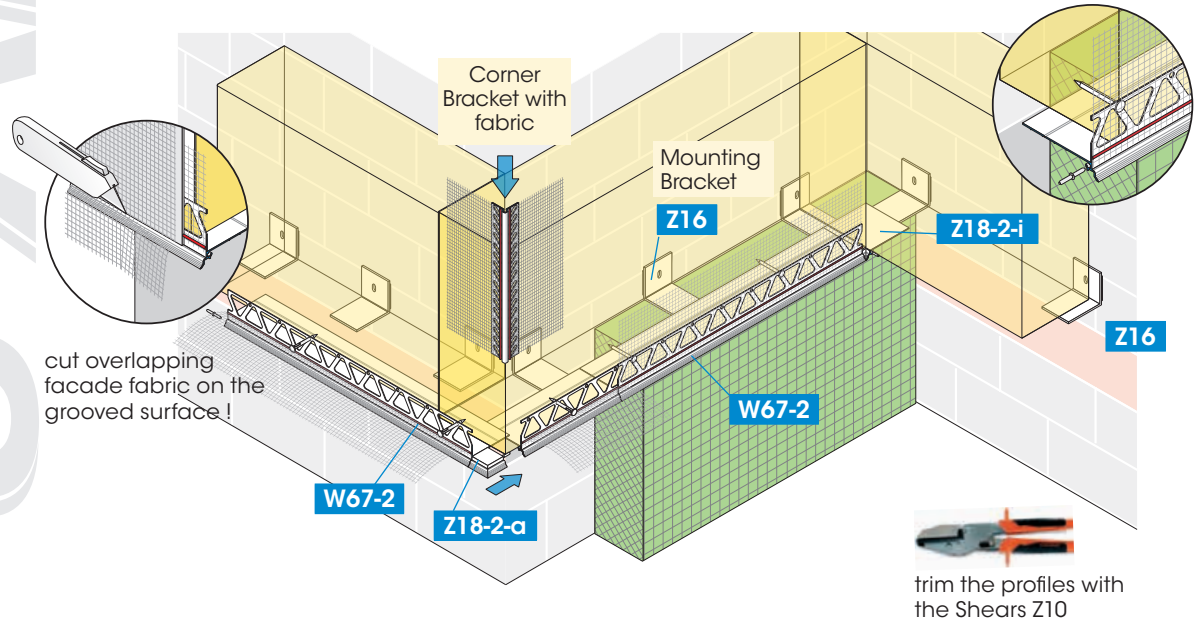

The plastic Base Edge Profile SOKA-FIX is an extended border profile with Drop Edge and Plug Connectors.

It is used if a perimeter insulation is present and the wall insulation is mounted afterwards. The profile is pushed between the two insulations and secured with Plastic Nails Z21 into the insulation. Underneath, towards the perimeter insulation, the profile is sealed using a PUR tape or a suitable APU profile. If the base insulation is added later, the wall insulation boards must be set on the self-adhesive Mounting Brackets Z16 (2 pieces per running meter). The Mounting Brackets have fitting outreaches for the respective insulation thicknesses. The flush joint of the Base Edge Profiles is achieved using the enclosed Plug Connectors Z13.

In order to create crack-free corners, the profiles are connected together using Corner Elements Z18-2-i/1 (for inner/outer corners).

When forming the corner with a Corner Bracket with fabric (e.g., W11), overlap the fabric parts of the Corner Bracket and the Base Edge Profile.

**Available in packed units:**  
25 bars of 2.00 m = 50.00 m  
incl. 25 Plug Connectors, 100 Plastic Nails, 4 outer  
and 2 inner Corner Elements

For detailed information see technical information sheet or visit us on the Internet at [www.apu.ch](http://www.apu.ch).